morleys

Stairnosings, Flooring Adhesives & Accessories



**Product Catalogue** 



#### **Our Value Will Floor You**

When you want the perfect finish trust a progressive British manufacturer who has been creating quality flooring accessories since 1986.

With a service that is second to none, competitive prices, free stair nosing measuring service\* and a continually expanding product range,

Morleys give you the edge every step of the way.

### Fast Free Measuring Service\*

Morleys provide a fast free\* measuring service for stair nosings which is guaranteed to save you time and money when providing bespoke cut sizes.

Our area sales managers are available to assist with product selection and advise on legislation, in relation to the Building Regulations Part M and the Disability Discrimination Act.

Our managers have extensive knowledge and practical experience with contract installation, maintenance and cleaning.

To arrange your measure contact your local Morleys distributor, area sales manager or the office on 01772 626 700.

#### **Product Sizes**

Stair nosings available in stock lengths of: 3.22mtr, 2.75mtr & 2.44mtrs unless otherwise stated

Carpet Metals, Stickdown & Clip-Fit available in: 2.70mtr unless otherwise stated

Bespoke sizes on request for all products

# **Contents**

#### SECTION 1.

#### Stair Nosings HN Range

- 4. 90° Straight
- 5. Bullnose
- 6. 83° Rakeback
- 7. Chevron

#### Stair Nosings SN Range

- 8. 90° Straight
- 9. Bullnose
- 10. 83° Rakeback
- 11. Budget
- 12. Castellated

#### Stair Nosings DDA Range

- 13. Heavyweight
- 14. Slimline
- 15. Premium Finishes

#### Inserts

- 16. Standard Insert Colours
- 17. MorGrip & Exterior Colours

#### **Angles**

- 18. 83° & 90° Angles
- 19. Angle Trims

Check out our full range by scanning the QR code

#### **Stair Nosing Extras**

- 20. Fabrications
- 21. Installation
- 22. Maintenance
- 23. Measuring Service

#### SECTION 2.

#### **Carpet Metals**

- 24. Naplocks
- 25. Naplocks
- 26. Cover Strips
- 27. Cover Strips
- 28. Special Purpose
- 29. Special Purpose

#### SECTION 3.

#### Stickdown Profiles

- 30. Stickdown
- 31. Stickdown

#### Additional


- 32. Accessories-Tapes
- 33. Adhesives
- 34. Contact Details

Find, select and specify our products with NBS Source




# **Section 1. Stair Nosings**

# **HN Range 90°**



Single Channel Straight 90°



Double Channel Straight 90°




Single Channel Straight 90°

90° profiles for use on square fronted staircases when fitting medium carpets and heavy duty smooth flooring

# **HN Range Bullnose**




Single Channel Bullnose



Double Channel Bullnose




Single Channel Large Bullnose




Double Channel Large Bullnose

Bullnose profiles for use on bullnose fronted staircases when fitting medium carpets and heavy duty smooth flooring

# **HN Range Rakeback 83°**



Single Channel 83° Rakeback



Double Channel 83° Rakeback

83° profiles for use on rakeback staircases when fitting medium carpets and heavy duty smooth flooring


# **Interlocking Sections**

NT1



Naplock section used to hold the carpet edge in place

NT3




Ramp section for a smooth transition to a flat surface

\*Both sections are for use with the Heaveyweight range and are available in stock lengths of 3220mm, 2750mm and 2440mm

# **HN Range Chevron**

#### **HN10**




Double Channel Chevron Fronted (small)

#### **HN12**




Double Channel Chevron Fronted (medium)

#### **HN14**



Double Channel Chevron Fronted (large)

#### **HN15**




Single Channel Chevron Fronted

Chevron fronted profiles can be used on narrow bullnose or square fronted staircases when fitting medium carpets and heavy duty smooth flooring


# SN Range 90°

#### SN<sub>1</sub>




Single Channel 90° Straight

#### SN<sub>2</sub>




Double Channel 90° Straight

#### SN9



Single Channel Straight 90° with Ramp

#### **SN20**




Double Channel 90° Straight with Ramp

90° profiles for use on square fronted staircases when fitting thinner floorcoverings such as vinyl, lino & lightweight carpets.

Profiles with Ramp Back are also suitable for LVT


# **SN Range Bullnose**

#### SN<sub>3</sub>




Single Channel Bullnose

#### SN<sub>4</sub>



Double Channel Bullnose

#### **SN17**




Single Channel Bullnose with Ramp

Bullnose profiles for use on bullnose staircases when fitting thinner floorcoverings such as vinyl, lino & lightweight carpets

Profiles with Ramp Back are also suitable for LVT


# **SN Range Rakeback 83°**

#### SN<sub>5</sub>




Single Channel 83° Rakeback

#### SN<sub>6</sub>




Double Channel 83° Rakeback

#### **SN13**



Single Channel 83° Rakeback with Ramp

#### **SN26**




Double Channel 83° Rakeback with Ramp

83° profiles for use on rakeback staircases when fitting thinner floorcoverings such as vinyl, lino & lightweight carpets.

Profiles with Ramp Back are also suitable for LVT


# **Budget Range**

SN7




Single Channel 90° Straight

**SN11** 



Single Channel 83° Rakeback

SN8




Single Channel Bullnose

Budget range nosings ideal for small domestic projects


# **Castellated**

### **SN15**



Castellated Top 90° Straight

#### **SN19**



Castellated Top 90° Straight with Ramp

90° profiles for use on exterior projects






HN7 Gold Mirrorflect stair nosings were used on a staircase at The Astor Court Hotel in London pics (above)

# **DDA Heavyweight Range**

**DISABILITY DISCRIMINATION ACT 2005** 

The Building Regulations require reasonable provision to be made for access to a building and use of facilities within a building. This can be achieved by following the principles of Approved Document M, or other recognised guidance such as BS8300. When undertaking building works or alterations, the design should therefore follow the guidance within such documents, noting any areas where compliance is not possible or practical within an Access Statement. This will provide a staircase or step that complies with the functional requirements of the Building Regulations.

#### DD1H



Single Channel Straight 90°

#### DD5H




Single Channel 83° Rakeback

90° & 83° profiles for use on staircases when fitting medium carpets and heavy duty smooth flooring


# **DDA Slimline Range**

#### DD1S



Single Channel Straight 90°

#### DD5S




Single Channel 83° Rakeback

#### DD9S



Single Channel Straight 90° with Ramp

#### **DD13S**



Single Channel 83° Rakeback with Ramp

 $90^{\circ}$  &  $83^{\circ}$  profiles for use on staircases when fitting thinner floorcoverings such as vinyl, lino & lightweight carpets. Profiles with Ramp Back are also suitable for LVT

# **Premium Finishes**

Elevate your nosing with one of our premium finishes.



#### Powder Coated Finishes also available for

Bespoke Projects

Colourful Alternatives

Full RAL colour range available

Special finishes for any aluminium product in this catalogue may be available upon request, any that are available will be subject subject to minimum quantities.

Lead time is normally 7 to 10 working days

# Standard Insert Colours



**Light Reflectance Value** 

LRV is a universal version for 'contrast'. Legislation (Equality Act 2010) requires that all new and refurbished public buildings and work places comply with current regulations via their 'Access Statement', ensuring safe entry, exit and safe passage throughout the building. A minimum of 30 points LRV difference is advised for adjacent surfaces.


# **MorGrip Insert Colours**

Increased slip resistance in both wet and dry environments.

Improved performance in areas of heavy traffic and harsh conditions.

For internal use, with our SN Range.





# **Exterior Insert Colours**

Specially designed for ultimate weather resistance and ant-slip properties For external use, with our SN Range.



Other colours are available in project quantities

# **Angles**

ANG29 ANG39 ANG69

3.8mm
90°


90°

90° Welded angles (often called 'stringers') are available for use with straight 90° nosings.



83° Welded angles (often called 'stringers') are available for use with rakeback 83° nosings.

# **Angle Trims**

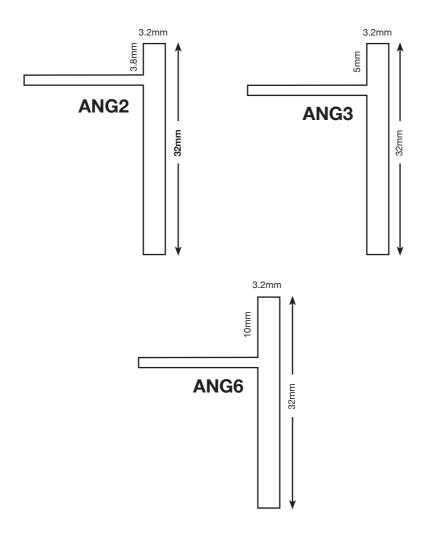

# **Fabrications**

#### **Curves**



All profiles, apart from SN15 & SN19, can be supplied preformed into bends, curves or shapes. Orders for these must be accompanied by a pattern or template detailing the main dimensions and relevant information.

Please note that preformed sections are normally supplied at least 25mm oversized, this is to allow for trimming on site.

#### **Mitres**



All profiles can be mitred and welded. Drawings or templates will be required for these.

# Installation

### **Stair Nosings Installation Instructions**

- Ensure that the stairs are flat, making good any irregularities
- Remove any debris and make sure that the stairs are clean
- Check the stair nosing is a good fit by placing on the correct stair
- Ensure the stair nosing is pushed up hard against the riser, then mark through the drill holes
- Remove the stair nosing then drill and plug where you have marked
- Apply adhesive to underside of the stair nosing if required, then reposition onto the step, allow adhesive to cure
- Screw down the stair nosing firmly
- Apply the insert plug to hide the screw



www.morleys-stairnosings.co.uk 01772 626700

# **Maintenance**

### **Stair Nosings & Trim Maintenance**

- To ensure the Stairnosings keep their appearance, they should be cleaned weekly, more frequently in areas of heavy traffic.
- Build-up of dirt and grease can prove hazardous.
- Inserts should be cleaned with a mild detergent diluted with water on a slightly damp cloth.
- Leave for a few minutes to break up soilage, then wipe off with a clean damp cloth.
- Allow to dry before use to avoid any slip hazard
- Aluminium can be lightly brushed with steel wool.
- Polishes will reduce anti-slip properties and solvent cleaners are not suitable.
- Strong detergents must not be used on stairnosing inserts as this may cause fading of the insert colour.
- Please avoid steam cleaning



sales@morleys2013.co.uk

# **Measuring Service**

Take the pressure off your project, ensuring you get the correct profile, at the correct sizes, with no wastage.



# **Section 2. Carpet Metals**




#### **Product Sizes**

Carpet Metals available in stock lengths of 2.70mtr & 900mm unless otherwise stated

# **Naplocks**

### **Dual Edge**

5S or 5G Dual Edge Double Naptrim is used to provide a safe, smooth transition



between two meeting carpets or tiles of the same or similar height. This product can be supplied punched or unpunched.

- · Standard (mill finish)
- · Satin Silver
- · Satin Gold
- · Satin / Dark Bronze\*
- Satin Black\*

<sup>\*</sup> Subject to minimum quantities

# **Naplocks**

### Single Edge

6S or 6G Single
Edge Naptrim is
used to secure
and protect the raw
edge of a carpet at the
point where it meets a resilient or hard floor.
This product can be supplied punched
or unpunched.

#### **Available Finishes**

- · Standard (mill finish)
- · Satin Silver
- · Satin Gold
- · Satin / Dark Bronze\*
- Satin Black\*

### **Heavy Duty Dual Edge**

18S or 18G
Heavy Duty Dual
Edge Naptrim
Raised Base Double
is used to provide a
safe, smooth transition
between two meeting carpets or tiles of the
same or similar height. This product can be
supplied punched or unpunched.

#### **Available Finishes**

- · Standard (mill finish)
- · Satin Silver
- · Satin Gold
- Satin / Dark Bronze\*
- Satin Black\*

### **Heavy Duty Single Edge**

23S or 23G Heavy
Duty Single Edge
Naptrim is used to
secure and protect the
raw edge of a carpet at
the point where it meets



the point where it meets a resilient or hard floor. This product can be supplied punched or unpunched.


- Standard (mill finish)
- Satin Silver
- · Satin Gold
- · Satin / Dark Bronze\*
- · Satin Black\*

<sup>\*</sup> Subject to minimum quantities

# **Cover Strips**

### Carpet Cover

1S or 1G Carpet Cover is used to provide a safe. smooth transition for both pedestrian and wheeled traffic.



This product is often utilised as a bridge at the point where two carpets of the same or similar height meet. They can be supplied drilled or undrilled.

#### Available Finishes

- · Standard (mill finish)
- · Satin Silver
- Satin Gold
- Satin / Dark Bronze\*
- Satin Black\*

### Large Lino Cover

2S or 2G Large Lino Cover is used to provide a safe. smooth transition for both pedestrian and wheeled traffic at the point where two areas of vinyl or lino meet. This product covers a greater surface area reducing wear at the join of the two floorcoverings. They can be supplied drilled or undrilled.

#### Available Finishes

- · Standard (mill finish)
- · Satin Silver
- Satin Gold
- Satin / Dark Bronze\*
- Satin Black\*

### Lino Cover

3S or 3G Lino Cover is used to provide a safe.



pedestrian and wheeled traffic at the point where two areas of vinyl or lino meet. This product is usually used at door or room thresholds. They can be supplied drilled or undrilled.

- · Standard (mill finish)
- · Satin Silver
- Satin Gold
- Satin / Dark Bronze\*
- Satin Black\*


<sup>\*</sup> Subject to minimum quantities

# **Cover Strips**

### **Small Lino Edge**

4S or 4G Small Lino
Edge is used for
sitting on top of the
carpet, wood or laminate
flooring up to 3.2mm thick.

drilled or undrilled.




#### **Available Finishes**

- · Standard (mill finish)
- · Satin Silver
- Satin Gold
- · Satin / Dark Bronze\*
- Satin Black\*

### **Medium Lino Edge**

14S or 14G Medium Lino Edge is used for sitting on top of the carpet, wood or laminate flooring up to 4.5mm thick.




#### **Available Finishes**

- · Standard (mill finish)
- · Satin Silver
- Satin Gold
- Satin / Dark Bronze\*
- Satin Black\*

#### Wide Cover 61mm

20S or 20G Wide Cover 61mm is used to provide a safe, smooth transition for b



#### \* Subject to minimum quantities

- Standard (mill finish)
- · Satin Silver
- Satin Gold
- · Satin / Dark Bronze\*
- Satin Black\*

# **Special Purpose**

### Z Edge 8mm

ZES or ZESG Z Edge 8mm is used to secure and protect the raw edge of a carpet joining any wood or laminate flooring up to 9mm thick.



This product can be supplied punched or unpunched. Leave gap for expansion.

#### Available Finishes

- · Standard (mill finish)
- · Satin Silver
- Satin Gold
- Satin / Dark Bronze\*
- Satin Black\*



Z Edge profiles—Great for joining wood or laminate to carpet.

### Z Edge 14mm

ZEL or ZELG Z Edge 14mm is used to secure and protect the raw edge of a carpet joining any wood or



laminate flooring up to 15mm thick. This product can be supplied punched or unpunched. Leave gap for expansion.

- · Standard (mill finish)
- · Satin Silver
- Satin Gold
- Satin / Dark Bronze\*
- Satin Black\*

<sup>\*</sup> Subject to minimum quantities

# **Special Purpose**

### **Square Edge**

9S or 9G Square Edge Naptrim is used to secure and protect the raw edge of a carpet joining any carpet, wood or laminate flooring up to 9mm thick. This product can be supplied punched or unpunched.

#### Available Finishes

- · Standard (mill finish)
- · Satin Silver
- · Satin Gold
- · Satin / Dark Bronze\*
- Satin Black\*

Matwell Edge

11S or 11G Matwell Edge is used for edging a recessed door mat. The product is a 90° angle, heavily ribbed for a non-slip finish and can be supplied drilled or undrilled.



#### Available Finishes

- · Standard (mill finish)
- · Satin Silver
- Satin Gold
- · Satin / Dark Bronze\*
- · Satin Black\*

### 1" Angle Edge

12S or 12G 1" Angle Edge is an inch by inch aluminium edge suitable for platform installations. The product is a 90° angle and can be supplied drilled or undrilled.

- · Standard (mill finish)
- · Satin Silver
- Satin Gold
- Satin / Dark Bronze\*
- · Satin Black\*

<sup>\*</sup> Subject to minimum quantities

# Section 3. Stickdown Profiles


Finishes available:-

Satin Silver / Satin Gold / Satin Bronze / Dark Bronze / Satin Black

Morleys Stickdown range is a quick and easy way to finish laminate and wood flooring installations. Double-sided gel tape on the underside of the profile allows the profile to be stuck onto the flooring after it has been fitted. Suitable for both 8mm and 14mm laminate and wood. Standard lengths are 2700mm but all can be supplied in 900mm


### **NE1 Straight Edge Trim 8mm**

Stickdown Edge Trim 8mm is for use with 8mm laminate installations to edge around the room against the skirting board, on the stairs or around a fireplace.




### **NE2 Straight Edge Trim 14mm**

Stickdown Edge Trim 14mm is for use with 14mm thick wood or laminate installations to edge around the room against the skirting board, on the stairs or around a fireplace.




### **NE3 Parquet Edge 8mm**

Stickdown Parquet Edge 8mm is used for sitting on top of wood or laminate flooring up to 8mm thick. This profile provides a diminishing finish down to hard flooring. When fitting leave a gap for expansion.



### **NE4 Parquet Edge 14mm**


Stickdown Parquet Edge 14mm is used for sitting on top of the wood or laminate flooring up to 14mm thick. This profile provides a diminishing finish down to hard flooring. When fitting leave a gap for expansion.



# Stickdown Profiles

### **NE5 Wide Seam Cover Strip**


Stickdown Cover Strip is used to cover the join where floorcoverings of the same or similar heights meet. It is a versatile strip but is predominantly used at door thresholds and laminate to laminate.



### **NE6 61mm Wide Seam Cover Strip**

Stickdown 61mm Wide Cover is used to cover the join where floorcoverings of the same or similar heights meet.

It is a versatile strip but is predominantly used at door thresholds and laminate to laminate.



### **NE7 Medium Lino Edge Stickdown**

Medium Lino Edge Stickdown is used for sitting on top of the carpet, wood or laminate flooring up to 4.5mm thick. This profile provides a diminishing finish down to hard flooring. When fitting leave a gap for expansion.




### **NE8 35mm Wide Smooth Cover**

Stickdown 35mm Wide Smooth Cover Strip is used to cover the join where floorcoverings of the same or similar heights meet. It is a versatile 35mm wide strip most often used at door thresholds and laminate to laminate.



### **NE10 Small Lino Edge Stickdown**

Small Lino Edge Stickdown is used for sitting on top of the carpet, wood or laminate flooring up to 3.2mm thick. This profile provides a diminishing finish down to hard flooring. When fitting leave a gap for expansion.



# Accessories — Tapes

### Safety Grip Tape / Adhesive Tape



#### Safety Grip Tape Colours Available:

Black, Green, Blue, Red, Yellow, Grey, Transparent, Fluorescent Hazard & Barrier 18.3 metres per roll Available in the following widths: 25mm, 50mm, 75mm, 100mm & 150mm



Double sided tape is available in 49mm & 37mm (Roll size 66mtr)

# **Fixing Solutions**

Fix your nosings using A17 for a fast, strong, visually clean installation.



# Adhesives range from





# **Contact us**

### In the office

Please call to speak to any of the sales team in our Preston office:



01772 626700



sales@morleys2013.co.uk



morleysstairnosings



Morleys 2013 Ltd



@Morleys\_UK



www.morleys-stairnosings.co.uk



Check out our full range by scanning the QR code

## In your area

#### **Area Sales Representatives**

#### **London & South East**

Paul Thomas 07799887305 paulthomas.morleys@gmail.com

#### **North West of England & North Wales**

Tom Walker 07767391960 tom@morleys2013.co.uk

#### **Yorkshire & North East**

Peter Zanetti 07836282845 p.zanetti@morleys2013.co.uk


#### **South West of England & South Wales**

Alan Coggins 07803514129 alcoggins.morleys@gmail.com

#### **Midlands**

Anders Perkins 07802918212 a20ajp@aol.com

# **Manufactured in Preston**

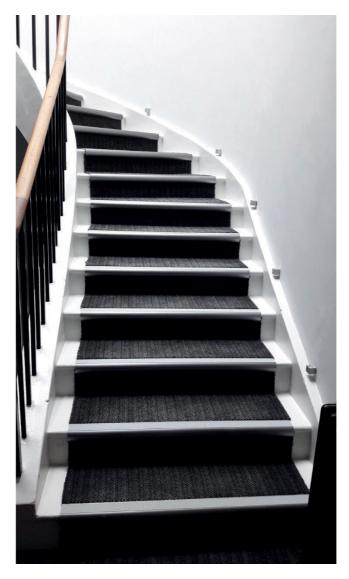

From our head office in Preston we can deliver to the four corners of the UK
All of our products are available from your local distributor

sales@morleys2013.co.uk

# morleys

Stairnosings, Flooring Adhesives & Accessories



Unit 20, Higher Walton Mill, Higher Walton, Preston PR5 4DJ Tel: 01772 626700 www.morleys-stairnosings.co.uk

